


# Cable Assembly Specification Sheet

- Low Cap. Foil & Braid Shielded
- Low Cap. Foil Shielded
- Twisted Pair Foil & Braid Shielded 
- Twisted-Pair Foil Shielded

- Twisted-Pair Individually Shielded
- Straight Multiconductor Foil & Braid Shielded
- Straight Multiconductor Foil Shielded

- UTP Category
- 5                      • 3
- Flat Silver Satin
- Other (Please Specify)

### Cable Jacket type

- PVC                      • Plenum

Length: \_\_\_\_\_

### Connector A

Gender:    • Male    • Female

#### Connector Type:

- DB9
- DB15
- DB25
- DB37
- DB50
- 15-Pin high-density
- 36-Pin Centronics
- 50-Pin Centronics
- 50-Pin Telco (RJ-21)
- RJ-11 4-wire
- RJ-12 6-wire
- RJ-45 8-wire
- DEC MMJ
- M/50
- M/34 (V.35)
- Spade lugs
- Other \_\_\_\_\_

#### Special Instructions:


- One end cut only
- Pinned only (conductor with pin)
- Pinned and numbered (conductor w/pin and # tag)
- Thumbscrews
- See attached specs.
- Reference Quote

**Drain Wire** (does not apply to unshielded cables):

- Cut drain wire
- Connect drain to pin 1
- Wrap drain w/conductor

### Pins Terminated

(Wire your selection)  
Ex: Conn A    Conn. B

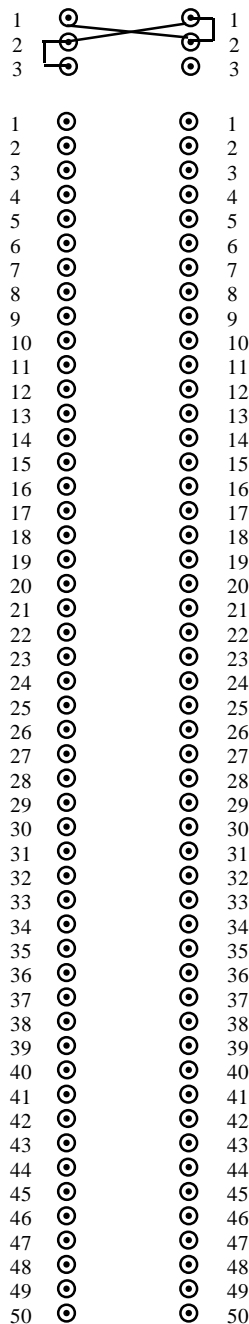

### Connector B

Gender:    • Male    • Female

#### Connector Type:

- DB9
- DB15
- DB25
- DB37
- DB50
- 15-Pin high-density
- 36-Pin Centronics
- 50-Pin Centronics
- 50-Pin Telco (RJ-21)
- RJ-11 4-wire
- RJ-12 6-wire
- RJ-45 8-wire
- DEC MMJ
- M/50
- M/34 (V.35)
- Spade lugs
- Other \_\_\_\_\_

#### Special Instructions:

- One end cut only
- Pinned only (conductor with pin)
- Pinned and numbered (conductor w/pin and # tag)
- Thumbscrews
- See attached specs.
- Reference Quote

**Drain Wire** (does not apply to unshielded cables):

- Cut drain wire
- Connect drain to pin 1
- Wrap drain w/conductor